

9002 Gorilla

2K Heavy-Duty Protective Coating

silco[®]

- / high UV and weathering resistance
- / provides a tough scratch and stain resistant surface
- / fine and coarse structures can be sprayed depending on the application
- / can be applied with UBS gun, HVLP gun, roller, or brush
- / can be used as a sound-deadening product in wheel-housings, chassis of cars, trucks and other



Black



Tintable



9002 Gorilla

2K Heavy-Duty Protective Coating

Product info

Highly resistant, tough, and slightly flexible 2K polyurethane-crylic paint providing a scratch-resistant protective coating for different surfaces.

It can withstand the toughest situations and protects against fuels and oils, water and salt.

It can be tinted with Unimix 30 tinting tonners to match any colour wanted (only apply for tintable).

Usage

Heavy duty surfaces on commercial vehicles; off-road vehicles (interior and exterior); chassis, floors, storage areas and other parts; camping cars, trailers and SUVs; roof racks and rooftop carriers; body panels, tube guards, wheel arches, truck and bus interior and exterior...



Drying

Pot-life (20°C/68°F)	1.5 h
Touch dry (20°C/68°F)	2 h
Touch dry (60°C/140°F)	15-20 min


Packaging

9002 Gorilla

Prod. Nr.	Colour	Volume	Box
9002-T-0,6	Tintable	600 ml	12 pcs
9002-B-0,6	Black	600 ml	12 pcs

How to use?

Preparation

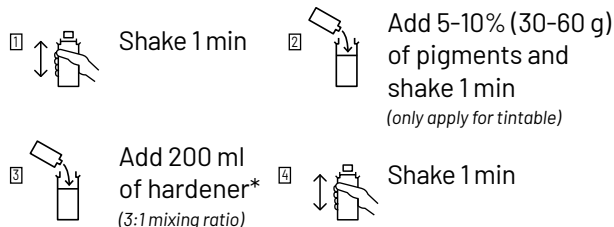

*If applying with spray gun or roller, 0-5% of 7050 Thinner needs to be added.

Application

UBS gun



1 st layer	Apply a uniform coat with a pressure setting of 2-4 bar(1) until full coverage is achieved.
Flash-off	Allow at least 10 minutes.
2 nd layer	Reduce the pressure to 1.5-2 bar and increase the spray distance to 45 - 60 cm.
Flash-off before baking	Allow 10-15 minutes.

Spray gun



1 st layer	Apply a uniform coat with a pressure setting of 2 bar until full coverage is achieved.
Flash-off	Allow at least 10 minutes.
2 nd or 3 rd layer	Reduce the pressure to 1.5-2 bar and increase the spray distance to 45 - 60 cm.
Flash-off before baking	Allow 10-15 minutes.

Roller



Apply evenly and overlapping, until opacity is achieved. If full hiding power is not yet achieved, a second coat can be applied after an intermediate flash-off time of 30-60 minutes.