

Product Information

9130 X13 Spectrum™

UHS 420 Fast Drying Clear Coat



Very
FAST DRYING
at 60°C or 20°C

Only
10 MINUTES
at 60°C

Only
2,5 HOURS
at 20°C



Immediate
POLISHING
after cooling down

Superior
GLOSS RETENTION
& UV protection

Very easy
APPLICATION
& leveling



Fast drying clear coat for complete resprays.

CERTIFICATE OF QUALITY
Product name: 9130 X13 Spectrum™

UV RESISTANCE


Sample	DL	Da	Db	CE	60° gloss initial (%)	60° gloss final (%)	Drop of gloss (%)
1	-0,35	-0,17	0,55	0,87	97,3	96,9	0,43
2	-0,42	-0,14	0,78	0,90	96,8	96,2	0,62
3	0,07	-0,15	0,11	0,13	97	96,3	0,72

DOI MEASUREMENT

Sample	Initial DOI (%)	Final DOI (%)	Drop of DOI (%)
1	98,7%	98,5%	0,2%
2	98,7%	98,5%	0,2%
3	98,7%	98,5%	0,2%

CERTIFIED QUALITY

EASY APPLICATION

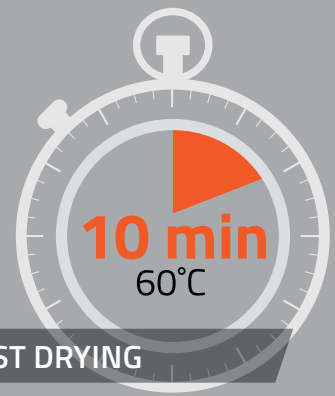

FAST DRYING

9130 X13 Spectrum™

UHS 420 Fast Drying Clear Coat

Mixing ratio 2:1

HARDENER

Extra Fast Fast Standard Slow
9122 9123 9125 9127

DRYING TIME *

20°C	2 - 3 h	3 h	3 - 4 h	5 - 6 h
60°C	10 min	10 - 15 min	15 min	15 - 20 min
IR	7 min	10 min	10 - 15 min	15 min
Flash-off	<5 min	<5 min	<5 min	<5 min
Potlife	60 min	60 min	60 min	60 min

THINNER

5 - 10 %

(7030 Fast/7050 Standard/7070 Slow)

*Indicative times subject to thinner type/application/environment ...

How to

APPLICATION

Fast hardeners are recommended only for vertical surfaces and low temperatures. Light half coat followed by full closed coat without flash off can be used for spot and quick repairs. For all other repairs, use two full coats application method, with flash off between coats (5 min). Flash off time and drying time depends on the combination of the hardeners and thinners used. For further and updated information please refer to the TDS published on www.silco.si.

Info

PRODUCT

Clear coat of highest quality with perfect drying profile and deep gloss for the most demanding refinish projects. Application of X13 Clear Coat is very easy and the overflow/leveling of the product is perfect. X13 Clear is characterized by superior gloss retention and UV resistance. Polishing is possible immediately after cooling down.

Packaging

CLEAR COAT

9130 X13 Spectrum
UHS 420 Fast Drying Clear Coat

Prod. Nr.	Content
9130-1 / 9130-5	1 L / 5 L

HARDENER

9122 - 9127 UHS Hardener
UHS Acrylic Hardener - mixing ratio 2:1

Prod. Nr.	Content	Description
9122-0,5 / 9122-2,5	500 ml / 2.5 L	Extra Fast
9123-0,5 / 9123-2,5	500 ml / 2.5 L	Fast
9125-0,5 / 9125-2,5	500 ml / 2.5 L	Standard
9127-0,5 / 9127-2,5	500 ml / 2.5 L	Slow