

PRIVATE LABEL PRODUCTS

from a Premium Producer



We are in this for **PASSION**
and have been from day one.

Private label division of the company Silco is committed to developing innovative products customized for bodyshops. Not offering only excess capacity but offering our expertise, research and development, fine-tuned manufacturing operations and reliable service.

We share your **DEDICATION**
to state-of-the-art bodyshop products.

Meet the toughest challenges of your customers with your brand and a confidential supplier. Not only do we pursue high-quality standards of our products, we respect your privacy along the way.

We are your **SILENT PARTNER**
on the other side of
YOUR SUCCESS.

5 steps of reaching
the **QUALITY**
of the **PRODUCTS!**



Stop looking for the
RIGHT products.

We **PRODUCE** them!

Focus on building your brand
awareness and customer
satisfaction.

We will take **CARE**
of the rest.

Take one step ahead of the others by
implementing proven, productive
and cost-effective products into your
own brand.

Experience the
Silco **DIFFERENCE!**

RESEARCH AND DEVELOPMENT

Comprehensive in-house research and development, combined
with years of experience - a guarantee not only for a balanced
product portfolio but for innovative, new refinish concepts.






PRODUCTION

Fine-tuned manufacturing process and ongoing
commitment to thorough process and product quality
control, from raw materials to the labels.
Well thought-out and precise workflow – for fast and
reliable production.

CUSTOMER SERVICE

We support you from the first idea up to production and delivery.
We provide professional consultancy and technical support,
ensuring that you operate at maximum efficiency and
productivity... in private.
Constant cooperation through every step of launching your
product helps us build long-term partnerships.

PUTTIES

						
PRODUCT	P32	P33		P34	P36	P38
TYPE	SOFT	SEMI-LIGHTWEIGHT		LIGHT SOFT	ULTRA LIGHT SOFT	FIBERGLASS
FEATURES / DESCRIPTION	Universal high-performance polyester putty, characterized by its fine texture, ease of application and good sanding.	High performance semi-lightweight polyester putty.		Universal lightweight polyester putty.	Universal ultra lightweight polyester putty.	Polyester putty reinforced with special-cut fiberglass.
SPECIFICATION						
MIXING RATIO	2-3% by weight	2-3% by weight		2-3% by weight	3% by weight	2-3% by weight
COLOUR	Beige	Blue		Beige	Yellow	Green
ADHESION	Steel, galvanized steel, aluminium, polyester laminates, old paint.	Steel, galvanized steel, aluminium, polyester laminates, old paint.		Steel, galvanized steel, aluminium, polyester laminates, old paint.	Steel, galvanized steel, aluminium, polyester laminates, old paint.	Steel, galvanized steel, aluminium, polyester laminates, old paint.
POT LIFE AT 20°C	3-4 min	3-4 min		3-4 min	3-4 min	3-4 min
DRYING TIME AT 20°C	20-25 min	20 min		15-20 min	20 min	20 min
DENSITY	1,8 kg/ L	1,43 kg/ L		1.27 kg/ L	0,9 kg/ L	1,23 kg/L
VOLUME / WEIGHT	1,8 kg	1 L		1 L	1 L / 3 L	1 L

FILLERS



PRODUCT	F2	F16		F17	F15	F21	F20
TYPE	HS	HS		HS	HS ULTRA FAST	PLASTIC PRIMER	ADDITIVE
FEATURES/ DESCRIPTION	HS top-quality acrylic primer-filler suitable for spot repair or larger surfaces with fast or normal drying speeds.	Universal high build HS acrylic primer filler suitable for all kind of repairs and different substrates.		Universal high build HS acrylic primer filler.	Top-quality ultra-fast acrylic primer-filler suitable for fast repair process.	Fast, 1K adhesion promoter for priming a vast majority of plastic substrates.	Adhesion additive for 2K primer fillers on plastic substrates.
HARDENER	H1 / H4	H16		H17	H15	-	-

SPECIFICATION

MIXING RATIO	5:1 (H1) / 3:1 (H4)	4:1		5:1	5:1	-	-
THINNER ADDITION	10-20% (5:1) / 10-20% (3:1)	5-10%		0-10 %	10 – 20%	-	-
COLOUR	A-White / B-Dark Grey / C-Grey	C-Grey		C-Grey	A-White / B-Dark Grey / C-Light Grey	Transparent or Silver	-
POT LIFE AT 20°C		20–40 min		30–40 min	35 min	-	-
DRYING TIME AT 60°C	25–30 min (H1) 5–7 min (H4)	10–15 min		20–30 min	5 min	-	
DRYING TIME AT 20°C	6–8 h (H1) 60 min (H4)	4–5 h		10–12 h	15–20 min	15–30 min	-
FILM THICKNESS (normal application)	60–180 microns	60–180 microns		60–200 microns	50–100 microns	5–7 microns	-
WET-ON-WET	No	No		No	No	-	-
ADHESION TO PLASTIC	Yes (with F20)	Yes (with F20)		Yes (with F20)	Yes (with F20)	Yes	-
VOLUME	1 L / 3,5 L	1 L / 3 L		1 L / 3,5 L	1 L / 3,5 L	1 L	500 ml

CLEAR COATS



PRODUCT	C19	C17		C18	C16	C11
TYPE	HS	HS		UHS	UHS	UHS ULTRA FAST
FEATURES / DESCRIPTION	High-quality HS clear coat.	Exceptionally fast HS clear coat.		Universal UHS clear coat.	Superior quality UHS fast clear coat.	Exceptionally fast UHS clear coat.
HARDENER	H1	H2		H2	H2	H11
SPECIFICATION						
MIXING RATIO	2:1	3:1		2:1	2:1	2:1
THINNER ADDITION	-	0–5%		0–5 %	5–10 %	0–5 %
POT LIFE AT 20°C	60–120 min	60 min		30–45 min	60–80 min	60 min
DRYING TIME (TIME TO POLISH*) AT 60°C	25 min	5 min		20–30 min	10–20 min	5–7 min
DRYING TIME AT 20°C	10–14 h	60 min		8–14 h	2–6 h	70 min
IR DRYING	10–15 min	5–7 min		7–15 min	7–15 min	5–7 min
VOC	2004/42/IIB(e) (840)577	2004/42/IIB(e) (840)<640		2004/42/IIB(d) (420)<420	2004/42/IIB(d) (420)<420	2004/42/IIB(d) (420)<420
VOLUME	1 L / 5 L	1 L / 3 L		1 L / 5 L	1 L / 5 L	1 L / 5 L

*AFTER COOLING DOWN

HARDENERS




PRODUCT	H1	H2	H4	H11	H15	H16
TYPE	HS	UHS	HS	UHS	HS	HS
SPEED	EF-Extra Fast / F-Fast / M-Medium / S-Slow	EF-Extra Fast / F-Fast / M-Medium / S-Slow	-	-	-	Fast
FEATURES / DESCRIPTION	Quality HS acrylic hardener.	High quality UHS acrylic hardener.	Quality HS acrylic hardener.	High quality UHS acrylic hardener.	Quality HS acrylic hardener.	Quality HS acrylic hardener.
RECOMMENDED FOR PRODUCTS	F2 / C19	C16 / C17 / C18	F2	C11	F15	F16
SHELF LIFE	12 months	12 months	12 months	12 months	12 months	12 months
VOLUME	0,2 L / 0,5 L / 0,7 L / 2,5 L	0,33 L / 0,5 L / 2,5 L	0,33 L	0,5 L / 2,5 L	0,2 L / 0,7 L	0,25 L / 0,75 L



PRODUCT	H17
TYPE	HS
SPEED	-
FEATURES / DESCRIPTION	Quality HS acrylic hardener.
RECOMMENDED FOR PRODUCTS	F17
SHELF LIFE	12 months
VOLUME	0,2 L / 0,7 L

THINNERS,
PREPARATION and
CLEANING PRODUCTS

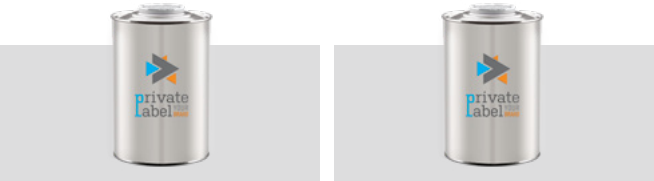

PRODUCT	T1	D1
TYPE	THINNER	DEGREASER
SPEED	F-Fast / M-Medium / S-Slow	-
FEATURES / DESCRIPTION	High quality thinner for diluting acrylic and polyurethanic coatings.	High quality antisilicone degreaser.
SHELF LIFE	24 months	24 months
VOLUME	1 L / 5 L	1 L / 5 L

What do our
CUSTOMERS SAY

PREMIUM BRAND DISTRIBUTOR

Silco's private label customer, UK

► *Placing my own brand of refinishing products on the market, proved to be the right decision. All the products were exceptionally well accepted and we received a lot of positive feedback.* ◀

**MARKETING DIRECTOR –
REFINISH BRANDS DISTRIBUTOR**

Silco's private label customer, Germany

► *From the first order to the delivery, it was much easier to introduce our private label to the market than initially thought. It was only possible due to the superb service from Silco. True meaning of collaboration!* ◀

OWNER OF A RETAIL SHOP

Silco's private label customer, Austria

► *Silco enabled me to offer most advanced products to my customers. I have increased the number of my customers, which was my goal when deciding for my private label range of products.* ◀



Process of **DELIVERY:**
STEP by **STEP!**





We are your **SILENT PARTNER**
on the other side of
YOUR SUCCESS.

Private Label Department

Silco d. o. o., Šentrupert 5a, 3303 Gomilsko, Slovenia

Tel: +386 3 703 31 80 / Fax: +386 3 703 31 88

E-mail: info@silco.si / www.silco.si

silco®

Perfect Refinish Within Minutes™